

Parallel female thread coupler



BSPP female thread

G 1/4

NPT female thread

-

Technology

"One push" safety system
(avoids hose whip)

Operating pressure

2 to 12 bar

Flow rate at 6 bar

833 l/min ($\Delta P = 0,6$ bar)

ID Passage

6 mm

Temperature

-15°C to +70°C

Construction

Composite body


Highlight

Anti-static Non scratch

Description

Reference	BSPP female thread	NPT female thread
USI 061101	G 1/4	-
USI 061102	G 3/8	-
USI 061103	G 1/2	-

Reference	BSPP female thread	NPT female thread
USI 061201		1/4" FNPT
USI 061202		3/8" FNPT
USI 061203		1/2" FNPT

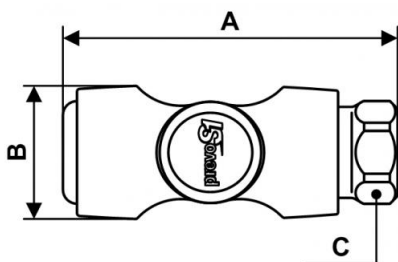

Dimensions

Reference	A mm	B mm	C mm
USI 061101	71	30	20
USI 061102	75	30	20
USI 061103	82	30	23
USI 061201	71	30	20
USI 061202	75	30	20
USI 061203	82	30	23