

Filter-Regulator-Lubricator ALTO 3 with diverter block for non-lubricated outlet on gantry



Profile

European 7.4 mm

Filtration (µm)

40

Flow rate (l/min at 6 bar ΔP)

0,6bar) = 1820

Inlet 1 adaptor

ERP 07

Outlet

2 x ESI 07 1 x ESI 07 (non lubricated outlet)

Temperature

+5°C to +50 °C

Construction

Body : Aluminium
Polycarbonate bowl with metallic protection

Highlight


Easy to transport

Equipped with

Coupler and adaptor

Description

Reference	Profile	Filtration (µm)	Flow rate (l/min at 6 bar ΔP)	Inlet 1 adaptor	Outlet	Flow rate (l/min at 6 bar ΔP : 0,6bar)
PTE HPES	European 7.4 mm	40	0,6bar) = 1820	ERP 07	2 x ESI 07 1 x ESI 07 (non lubricated outlet)	833
PTE HPIS	ISO 6150 B	40	0,6bar) = 2028	IRP 06	2 x ISI 06 1 x ISI 06 (non lubricated outlet)	2800
PTE HPIS8	ISO 6150 B	40		IRP 08	2 x ISI 08 1 x ISI 08 (non lubricated outlet)	
PTE HPIS11	ISO 6150 B	40		IRP 11	1 x ISI 11 1 x ISI 06 (non lubricated outlet)	

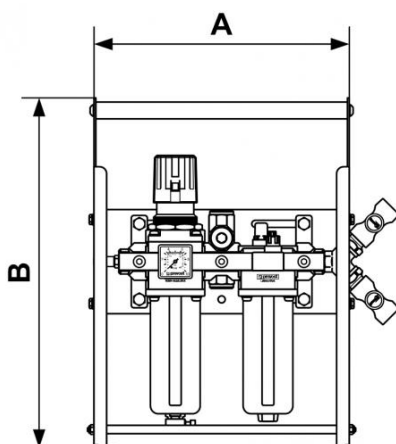

Dimensions		
Reference	A mm	B mm
PTE HPES	303	417
PTE HPIS	11.929	16.417
PTE HPIS8	303	417
PTE HPIS11	11.929	16.417