


## ISO B hydraulic adaptor



<u><b>BSPF female thread</b></u> G 3/8	<u><b>Nominal Ø (mm)</b></u> 10	<u><b>Flow rate (nominal in l/min)</b></u> 23	<u><b>Max operating pressure (bar)</b></u> 250
<u><b>Profile</b></u> ISO B	<u><b>Technology</b></u> Ball lock	<u><b>Temperature</b></u> -25°C to +100°C	<u><b>Construction</b></u> Body: steel
<u><b>Applications</b></u> Industry	<u><b>Connection</b></u> Semi-automatic		

Description				
Reference	BSPF female thread	Nominal Ø (mm)	Flow rate (nominal in l/min)	Max operating pressure (bar)
<b>HCIB 106102</b>	G 3/8	10	23	250
<b>HCIB 066101</b>	G 1/4	6	12	250
<b>HCIB 136103</b>	G 1/2	13	45	250

Reference	BSPP female thread	Nominal Ø (mm)	Flow rate (nominal in l/min)	Max operating pressure (bar)
<b>HCIB 206104</b>	G 3/4	20	106	250
<b>HCIB 256105</b>	G 1	25	189	250

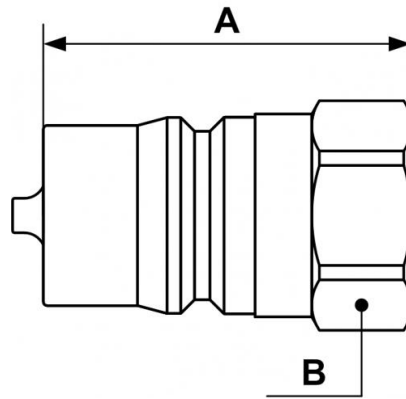

### Dimensions

Reference	A mm	B mm
<b>HCIB 106102</b>	42.5	22
<b>HCIB 066101</b>	38	19
<b>HCIB 136103</b>	48	27
<b>HCIB 206104</b>	57	34
<b>HCIB 256105</b>	65.5	41