

ALTO 3 - Submicronic filter set with regulator and gauge



BSPP female thread

G 1/2

Flow rate (l/min at 6 bar ?P

0.3bar) = 1500

Max operating pressure (bar)

12

Filtration (µm)

5 and 0.01

Temperature

+5°C to +50 °C

Construction


Body : Aluminium
Polycarbonate bowl with
metallic protection

Equipped with

Manual drain

Description

| Reference | BSPP female thread | Flow rate (l/min at 6 bar ?P | Max operating pressure (bar) | Filtration (µm) |
|-----------------|--------------------|------------------------------|------------------------------|-----------------|
| KTB CSM3 | G 1/2 | 0.3bar) = 1500 | 12 | 5 and 0.01 |

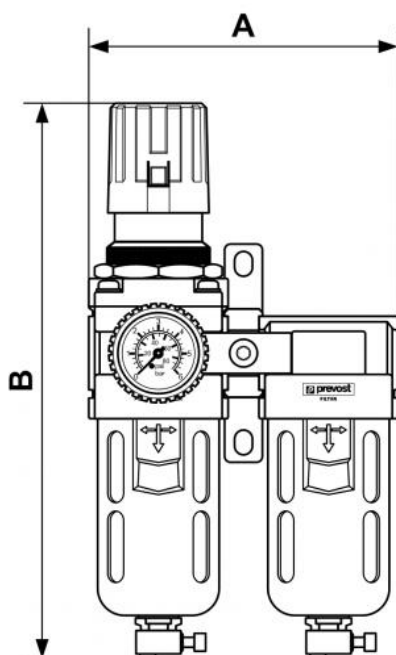

Dimensions

| Reference | A mm | B mm |
|-----------------|------|------|
| KTB CSM3 | 156 | 280 |