

ALTO 1 - Filter-Regulator (gauge included) with wall bracket and prevoS1 safety quick release coupler



BSPP female thread

G 1/4

Flow rate (l/min at 7 bar ΔP)

1bar) = 550

Max operating pressure (bar)

12

Filtration (μm)

25

Equipped with 1 coupling

ISI 06

Temperature

+5°C to +50 °C

Construction

Body : Aluminium
Polycarbonate bowl with metallic protection


Equipped with

Manual drain

Description

Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP)	Max operating pressure (bar)	Filtration (μm)	Equipped with 1 coupling
KTM SM1BS	G 1/4	1bar) = 550	12	25	BSI 06
KTM SM1ES	G 1/4	1bar) = 550	12	25	ESI 07

Reference	BSPP female thread	Flow rate(l/min at 7 bar Δ P	Max operating pressure (bar)	Filtration (μ m)	Equipped with 1 coupling
KTM SM1IS	G 1/4	1bar) = 550	12	25	ISI 06

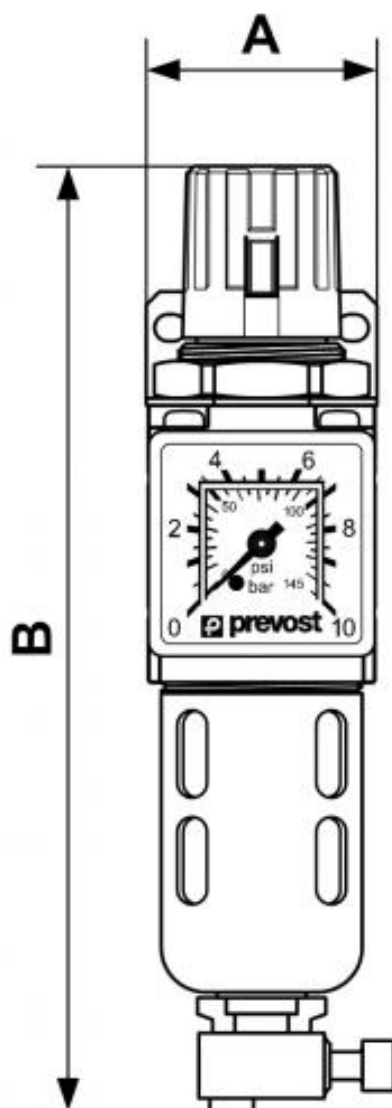

Dimensions		
Reference	A mm	B mm
KTM SM1BS	40	170
KTM SM1ES	40	170
KTM SM1IS	40	170