

ALTO 1 - 2-piece-set - Filter-Regulator-Lubricator (gauge included) with wall bracket



BSPP female thread

G 1/8

Flow rate (l/min at 7 bar

?P : 1bar)

500

Max operating pressure

(bar)

12

Filtration (µm)

25

Temperature

+5°C to +50 °C

Construction

Body : Aluminium Polycarbonate bowl with metallic protection


Equipped with

Manual drain

Description

Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP : 1 bar)	Max operating pressure (bar)	Filtration (µm)
KTB SM0	G 1/8	500	12	25

Reference	BSPF female thread	Flow rate (l/min at 7 bar ΔP : 1bar)	Max operating pressure (bar)	Filtration (μ m)
KTB SM1	G 1/4	500	12	25

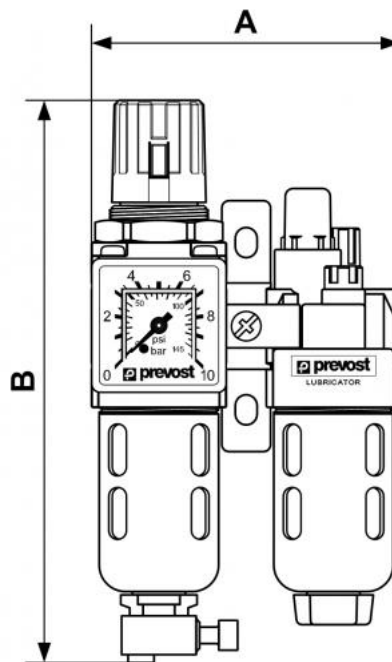

Dimensions

Reference	A mm	B mm
KTB SM0	92	170
KTB SM1	92	170