

ALTO 1 - Filter-Regulator (gauge included) with wall bracket



BSPP female thread

G 1/8

Flow rate (l/min at 7 bar ΔP)

1 bar) = 550

Max operating pressure (bar)

12

Filtration (μm)

25

Temperature

+5°C to +50 °C

Construction


Body : Aluminium
Polycarbonate bowl with metallic protection

Equipped with

Manual drain

Description

Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP)	Max operating pressure (bar)	Filtration (μm)
KTM SM0	G 1/8	1 bar) = 550	12	25
KTM SM1	G 1/4	1 bar) = 550	12	25

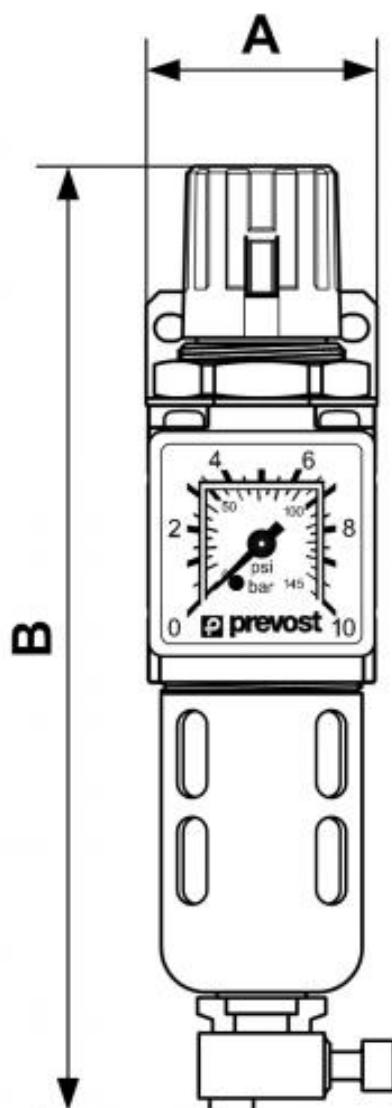

Dimensions		
Reference	A mm	B mm
KTM SM0	40	170
KTM SM1	40	170