


Reversible drill pistol



Diameter (Chuck (mm)) 10 mm 3/8"	Consumption (l/min) 120	Power (CV - W) 0.45 CV - 330 W	Rotation speed (rpm) F1: 1000 F2: 2000
BSPT female thread R 1/4	Sound level (dB(A)) 80	Weight (kg) 1.15	Max operating pressure 6,2 bar
Applications Drilling in industrial or automotive sectors	Connection Supplied with 3 adaptors: ISO 6150 B; European 7,4 mm; ARO 210		

Description							
Reference	Diameter (Chuck (mm))	Consumption (l/min)	Power (CV - W)	Rotation speed (rpm)	BSPT female thread	Sound level (dB(A))	Weight (kg)
TAD P382000	10 mm 3/8"	120	0.45 CV - 330 W	F1: 1000 F2: 2000	R 1/4	80	1.15

Reference	Diameter (Chuck (mm))	Consumption (l/min)	Power(CV - W)	Rotation speed (rpm)	BSPT female thread	Sound level (dB(A))	Weight (kg)
TAD P380800	13 mm 1/2"	113	0.45 CV - 330 W	F1: 450 F2: 800	R 1/4	80	1.7

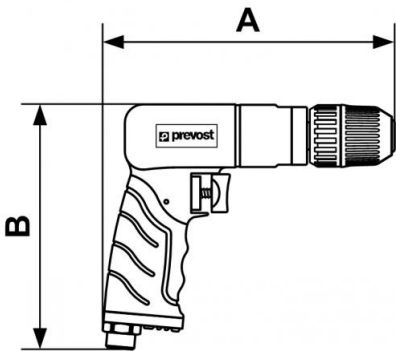

Dimensions		
Reference	A mm	B mm
TAD P382000	185	160
TAD P380800	210	160