

Straight air drill



Diameter (Chuck (mm))

10 mm 3/8"

Rotation speed (rpm)

2500

Weight (kg)

1.04

Consumption (l/min)

113

BSPT female thread

R 1/4

Max operating pressure

6,2 bar

Connection

Supplied with 3 adaptors: ISO
6150 B; European 7,4 mm; ARO
210

Power (CV - W)

0.5 CV - 330 W

Sound level (dB(A))

80


Applications

Drilling in industrial or automotive
sectors

Description

Reference	Diameter (Chuck (mm))	Consumption (l/min)	Power (CV - W)	Rotation speed (rpm)	BSPT female thread	Sound level (dB(A))	Weight (kg)
-----------	-----------------------	---------------------	----------------	----------------------	--------------------	---------------------	-------------

TAD S382500	10 mm 3/8"	113	0.5 CV - 330 W	2500	R 1/4	80	1.04
------------------------	------------	-----	-------------------	------	-------	----	------

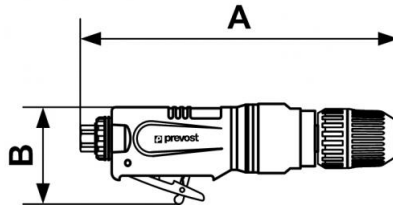

Dimensions		
Reference	A mm	B mm
TAD S382500	218	70