


Belt sander



<u>Dimensions (belt(mm))</u>	<u>Consumption (l/min)</u>	<u>Power (CV - W)</u>	<u>Rotation speed (rpm)</u>
10 x 330	113	0.5 CV - 370 W	16 000
<u>BSPT female thread</u>	<u>Sound level (dB(A))</u>	<u>Weight (kg)</u>	<u>Max operating pressure</u>
R 1/4	80	0.95	6,2 bar
<u>Applications</u>	<u>Highlight</u>	<u>Connection</u>	
Deburring, finishing and preparation prior to painting	Easy to adjust	Supplied with 3 adaptors: ISO 6150 B; European 7,4 mm; ARO 210	

Description							
Reference	Dimensions (belt(mm))	Consumption (l/min)	Power (CV - W)	Rotation speed (rpm)	BSPT female thread	Sound level (dB(A))	Weight (kg)
TBS 10330	10 x 330	113	0.5 CV - 370 W	16 000	R 1/4	80	0.95

Reference	Dimensions (belt(mm))	Consumption (l/min)	Power(CV - W)	Rotation speed (rpm)	BSPT female thread	Sound level (dB(A))	Weight (kg)
TBS 20520	20 x 520	113	0.5 CV - 370 W	16 000	R 1/4	80	1.4

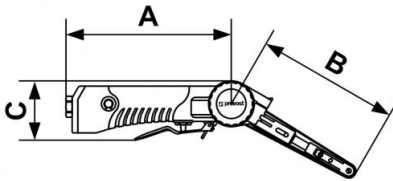

Dimensions			
Reference	A mm	B mm	C mm
TBS 10330	172	148	62
TBS 20520	172	218	62