


Straight screwdriver



<u>Chuck type</u> 6.35 mm Hex. 1/4"	<u>Torque (Nm)</u> 5 - 13	<u>Consumption (l/min)</u> 142	<u>Rotation speed (rpm)</u> 1800
<u>BSPT female thread</u> R 1/4	<u>Sound level (dB(A))</u> 102	<u>Weight (kg)</u> 1.3	<u>Max operating pressure</u> 6,2 bar
<u>Applications</u> Automotive and industrial sectors	<u>Connection</u> Supplied with 3 adaptors: ISO 6150 B; European 7,4 mm; ARO 210		

Description							
Reference	Chuck type	Torque (Nm)	Consumption (l/min)	Rotation speed (rpm)	BSPT female thread	Sound level (dB(A))	Weight (kg)
TSD S1800I	6.35 mm Hex. 1/4"	5 - 13	142	1800	R 1/4	102	1.3

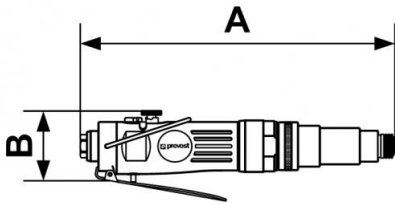

Dimensions		
Reference	A mm	B mm
TSD S1800I	260	57