


Composite air impact wrench - Twin hammer - Reinforced twin hammer - In case



<u>Square driver</u> 3/4"	<u>Max. unscrew torque (Nm)</u> 1763	<u>Consumption (l/min)</u> 206	<u>Rotation speed (rpm)</u> 6000
<u>BSPT female thread</u> R 3/8	<u>Sound level (dB(A))</u> 97.8	<u>Weight (kg)</u> 7.5	<u>Max operating pressure</u> 6,2 bar
<u>Applications</u> Fitting and removal of bolts and screws	<u>Highlight</u> Tightening capacity	<u>Connection</u> Supplied with 3 adaptors: ISO 6150 B; European 7,4 mm; ARO 210	

Description							
Reference	Square driver	Max. unscrew torque (Nm)	Consumption (l/min)	Rotation speed (rpm)	BSPT female thread	Sound level (dB(A))	Weight (kg)
TIW C341630K	3/4"	1763	206	6000	R 3/8	97.8	7.5

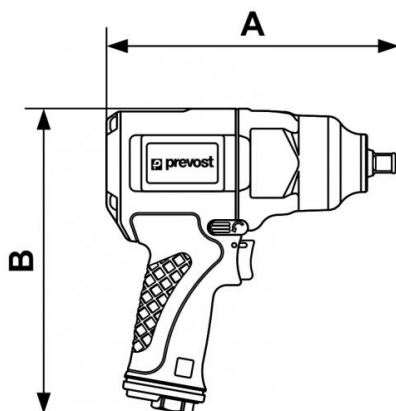

Dimensions		
Reference	A mm	B mm
TIW C341630K	222	223