

ALTO 3 - 40 bar Regulator with gauge



BSPP female thread

G 1/2

Flow rate (l/min at 10 bar)

5000

Operating pressure (bar)

Inlet: 40 Outlet: 0.5-30

Temperature

+5°C to +50 °C

Construction


Body : Aluminium
Polycarbonate bowl with
metallic protection

Equipped with

Manual drain

Description

Reference	BSPP female thread	Flow rate (l/min at 10 bar)	Operating pressure (bar)
TR VHPM3	G 1/2	5000	Inlet: 40 Outlet: 0.5-30

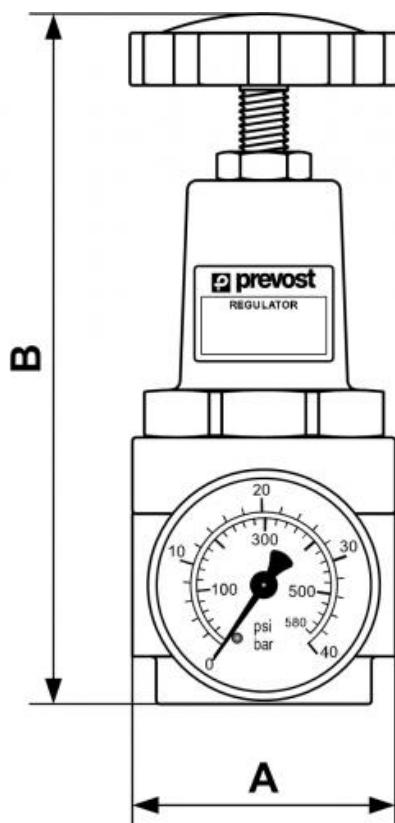

Dimensions		
Reference	A mm	B mm
TR VHPM3	55	140