


## Valve coupler for agricultural machinery



<b><u>Female thread</u></b> M18 x 1.5	<b><u>Nominal Ø (mm)</u></b> 13	<b><u>Flow rate (nominal in l/min)</u></b> 24	<b><u>Max operating pressure (bar)</u></b> 200
<b><u>Profile</u></b> Interchangeable	<b><u>Technology</u></b> Screw lock	<b><u>Temperature</u></b> -25°C to +100°C	<b><u>Construction</u></b> Body: steel
<b><u>Applications</u></b> Agricultural	<b><u>Highlight</u></b> Pressurised connection	<b><u>Connection</u></b> Manual screw thread	

Description				
Reference	Female thread	Nominal Ø (mm)	Flow rate (nominal in l/min)	Max operating pressure (bar)
<b>HVV 131181</b>	M18 x 1.5	13	24	200

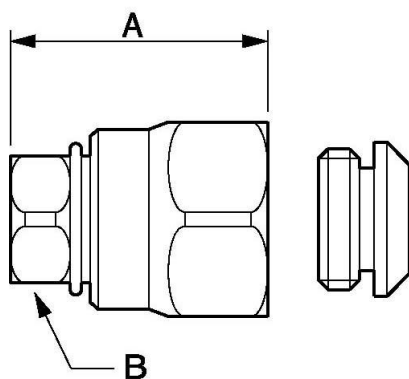

Dimensions		
Reference	A mm	B mm
<b>HVV 131181</b>	54	22