


prevoS1 blow gun with OSHA polyamide composite nozzle - Pocket model



Blowing force (at 6 bar (g)) 168	Dynamic pressure (at 10 mm at 6 bar (bar)) 0.5	Air consumption (at 6 bar (Nm3/h)) 14	Sound level (at 6 bar (dBA)) 89
Max operating pressure 12 bar	Temperature -15°C to +70°C	Construction Polyamide composite body	Highlight Compact
Connection Built-in adaptor			

Description				
Reference	Blowing force (at 6 bar (g))	Dynamic pressure (at 10 mm at 6 bar (bar))	Air consumption (at 6 bar (Nm3/h))	Sound level (at 6 bar (dBA))

APG 06OSH	168	0.5	14	89
-----------	-----	-----	----	----

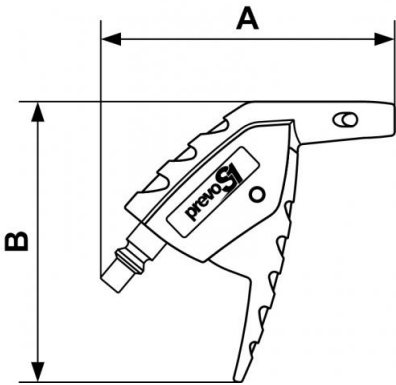

Dimensions		
Reference	A mm	B mm
APG 06OSH	97	93