


prevoS1 blow gun with metal nozzle



Blowing force (at 6 bar (g))	Dynamic pressure (at 10 mm at 6 bar (bar))	Air consumption (at 6 bar (Nm3/h))	Sound level (at 6 bar (dBA))
390	2.2	20	89
Profile	Max operating pressure	Temperature	Construction
British	12 bar	-15°C to +70°C	Polyamide composite body
Highlight	Connection		
Compact	Built-in adaptor		

Description				
Reference	Blowing force (at 6 bar (g))	Dynamic pressure (at 10 mm at 6 bar (bar))	Air consumption (at 6 bar (Nm3/h))	Sound level (at 6 bar (dBA))

BBG 06MTL	390	2.2	20	89
-----------	-----	-----	----	----

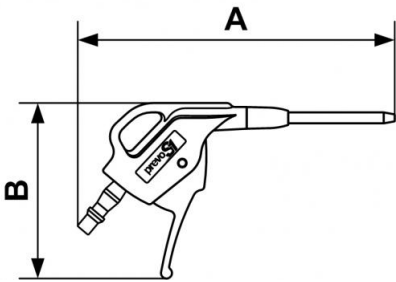

Dimensions		
Reference	A mm	B mm
BBG 06MTL	175	97