


prevoS1 blow gun with OSHA polyamide composite nozzle - Pocket model



Blowing force (at 6 bar (g))	Dynamic pressure (at 10 mm at 6 bar (bar))	Air consumption (at 6 bar (Nm3/h))	Sound level (at 6 bar (dBA))
168	0.5	14	89
Max operating pressure	Temperature	Construction	Highlight
12 bar	-15°C to +70°C	Polyamide composite body	Compact
Connection			
Built-in adaptor			

Description				
Reference	Blowing force (at 6 bar (g))	Dynamic pressure (at 10 mm at 6 bar (bar))	Air consumption (at 6 bar (Nm3/h))	Sound level (at 6 bar (dBA))

UPG 06OSH	168	0.5	14	89
-----------	-----	-----	----	----

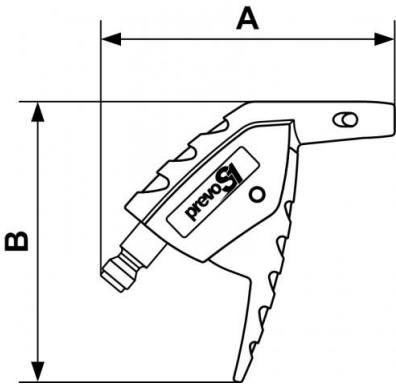

Dimensions		
Reference	A mm	B mm
UPG 060SH	97	93