

ALTO 2 - Filter-Regulator (gauge included) with wall bracket and prevoS1 safety quick release coupler



BSPP female thread

G 3/8

Flow rate (l/min at 7 bar ?P

1bar) = 750

Max operating pressure (bar)

12

Filtration (µm)

25

Equipped with 1 coupling

BSI 06

Temperature

+5°C to +50 °C

Construction


Body : Aluminium
Polycarbonate bowl with metallic protection

Equipped with

Manual drain

Description

Reference	BSPP female thread	Flow rate (l/min at 7 bar ?P	Max operating pressure (bar)	Filtration (µm)	Equipped with 1 coupling	Flow rate (l/min at 7 bar ΔP : 1bar)
KTM SM2BS	G 3/8	1bar) = 750	12	25	BSI 06	833
KTM SM2ES	G 3/8	1bar) = 1800	12	25	ESI 07	
KTM SM2IS	G 3/8		12	25	ISI 06	

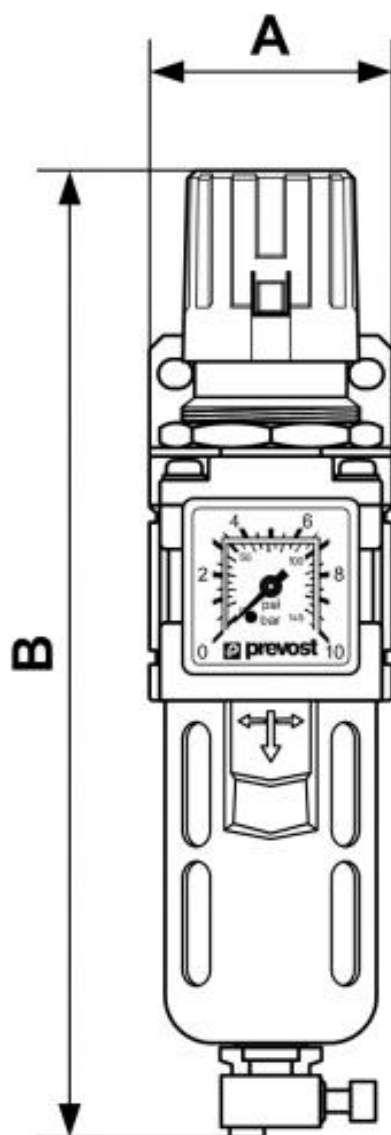

Dimensions		
Reference	A mm	B mm
KTM SM2BS	55	220
KTM SM2ES	55	220
KTM SM2IS	2.165	8.661