


ALTO 2 - Filter-Regulator (gauge included) with wall bracket and provoS1 safety quick release coupler



<u>BSPP female thread</u> G 3/8	<u>Flow rate (l/min at 7 bar ?P</u> 1bar) = 1800	<u>Max operating pressure (bar)</u> 12	<u>Filtration (µm)</u> 25
<u>Equipped with 1 coupling</u> ESI 07	<u>Temperature</u> +5°C to +50 °C	<u>Construction</u> Body : Aluminium Polycarbonate bowl with metallic protection	<u>Equipped with</u> Manual drain

Description						
Reference	BSPP female thread	Flow rate (l/min at 7 bar ?P	Max operating pressure (bar)	Filtration (µm)	Equipped with 1 coupling	Flow rate (l/min at 7 bar ΔP : 1bar)
KTM SM2BS	G 3/8	1bar) = 750	12	25	BSI 06	833
KTM SM2ES	G 3/8	1bar) = 1800	12	25	ESI 07	
KTM SM2IS	G 3/8		12	25	ISI 06	

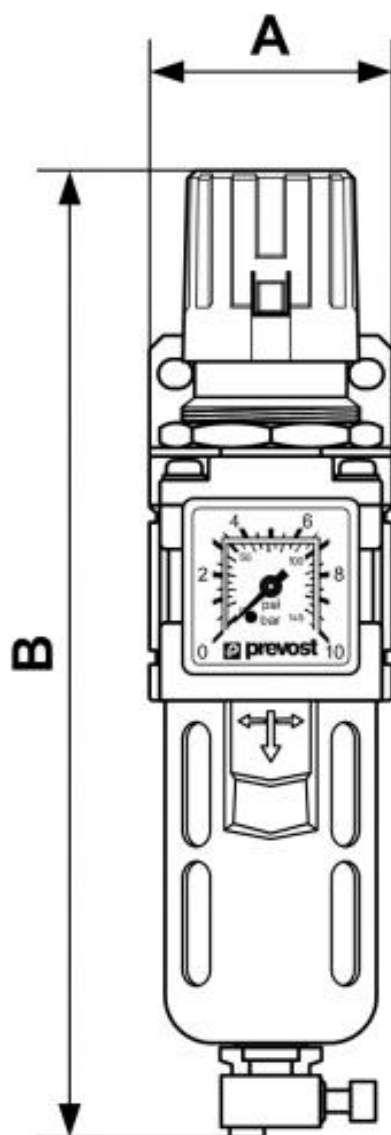

Dimensions		
Reference	A mm	B mm
KTM SM2BS	55	220
KTM SM2ES	55	220
KTM SM2IS	2.165	8.661