


ALTO 3 - Filter-Regulator (gauge included) with wall bracket and prevoS1 safety quick release coupler



<u>BSPP female thread</u> G 1/2	<u>Flow rate (l/min at 7 bar ΔP)</u> 1bar) = 750	<u>Operating pressure (bar)</u> Inlet: 12 Outlet: 0.5-10	<u>Filtration (μm)</u> 25
<u>Equipped with 1 coupling</u> BSI 06	<u>Temperature</u> +5°C to +50 °C	<u>Construction</u> Body : Aluminium Polycarbonate bowl with metallic protection	<u>Equipped with</u> Manual drain

Description						
Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP	Operating pressure (bar)	Filtration (μm)	Equipped with 1 coupling	Flow rate (l/min at 7 bar ΔP : 1bar)

KTM SM3BS	G 1/2	1bar) = 750	Inlet: 12 Outlet: 0.5-10	25	BSI 06	833
KTM SM3ES	G 1/2	1bar) = 1820	Inlet: 12 Outlet: 0.5-10	25	ESI 07	
KTM SM3IS	G 1/2		Inlet: 12 Outlet: 0.5-10	25	ISI 06	

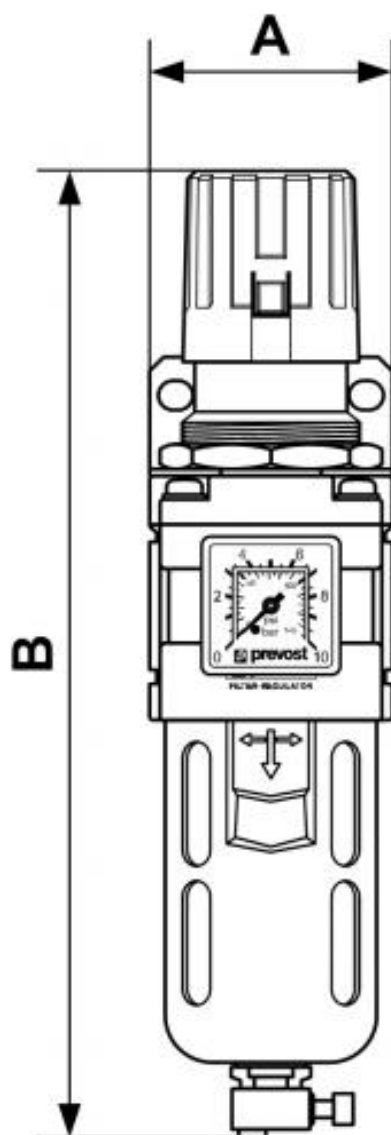

Dimensions		
Reference	A mm	B mm
KTM SM3BS	70	280
KTM SM3ES	70	280
KTM SM3IS	2.756	11.024