


Sandblaster



<u>Inlet BSPP female thread</u> G 1/4	<u>Capacity (l)</u> 1.2	<u>Flow rate (at 8 bar (l/min))</u> 450	<u>Construction (Tank)</u> High density polyethylene
<u>Operating pressure</u> 6 to 12 bar	<u>Temperature</u> -10°C to + 80°C	<u>Construction</u> Acetal plastic body	<u>Applications</u> Stripping - cleaning Automotive sector, industry

Description				
Reference	Inlet BSPP female thread	Capacity (l)	Flow rate (at 8 bar (l/min))	Construction (Tank)
BG SAND1	G 1/4	1.2	450	High density polyethylene

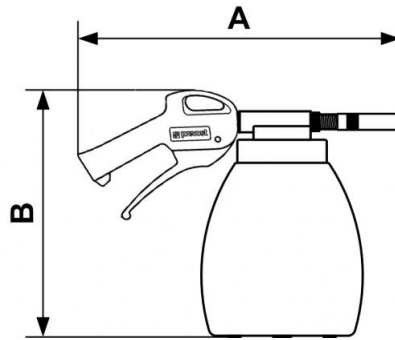

Dimensions

Reference	A mm	B mm
BG SAND1	260	200