

Spraygun for cleaning



Inlet BSPP female thread

G 1/4

Capacity (l)

1.2

Flow rate (at 8 bar (l/min))

100

Construction (Tank)

high density polyethylene

Operating pressure

6 to 12 bar

Temperature

-10°C to + 80°C

Construction

Acetal plastic body


Applications

Stripping - cleaning

Automotive sector, industry

Description

Reference	Inlet BSPP female thread	Capacity (l)	Flow rate (at 8 bar (l/min))	Construction (Tank)
BG SPRAY1	G 1/4	1.2	100	high density polyethylene

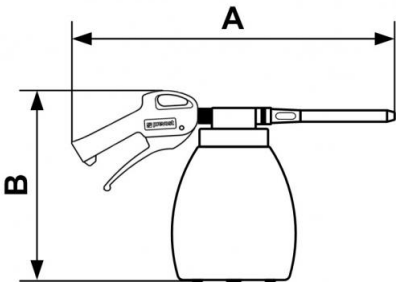

Dimensions		
Reference	A mm	B mm
BG SPRAY1	350	200