

Female thread double port wall bracket - 2 couplers and drain - ISO 6150 C Profile - ID passage 8 mm



Inlet BSPP female thread

G 1/2

Outlet 2 couplings

CSI 08

Technology

"One push" safety system
(avoids hose whip)

Operating pressure

2 to 12 bar

Flow rate at 6 bar

2028 l/min ($\Delta P = 0,6$ bar)

ID Passage

8 mm

Temperature

-15°C to +70°C

Construction


Composite body

Highlight

Anti-static Non scratch

Description

Reference	Inlet BSPP female thread	Outlet 2 couplings
CSI 088103WK	G 1/2	CSI 08
CSI 088104WK	G 3/4	CSI 08

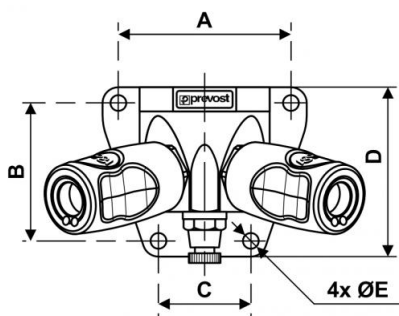

Dimensions

Reference	A mm	B mm	C mm	D mm	E mm
CSI 088103WK	71	57	38	70	6.5
CSI 088104WK	71	57	38	70	6.5