

## Parallel male thread coupler



### BSPB male thread

G 1/4

### Profile

British

### ID Passage

6 mm

### Construction

Treated steel Corrosion-proof treatment

### Operating pressure

0 to 12 bar

### Technology

Push button

### Temperature

-15°C to +70°C

### Applications

Corrosive atmospheres

### Flow rate at 6 bar

750 l/min ( $\Delta P = 0,6$  bar)

### Highlight

Anti-static

## Description

Reference

BSPB male thread

**BRM 061151**


G 1/4

**BRM 061152**

G 3/8

**BRM 061153**

G 1/2

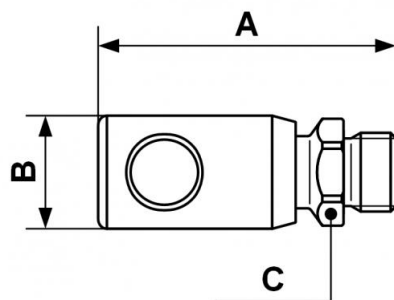

| Dimensions        |      |      |      |
|-------------------|------|------|------|
| Reference         | A mm | B mm | C mm |
| <b>BRM 061151</b> | 55   | 26   | 20   |
| <b>BRM 061152</b> | 56   | 26   | 23   |
| <b>BRM 061153</b> | 58   | 26   | 26   |