


Female thread double port wall bracket - 2 couplers and drain - British Profile - ID passage 6 mm



<u>Inlet BSPP female thread</u> G 1/2	<u>Outlet 2 couplings</u> BRM 06	<u>Profile</u> British	<u>ID Passage</u> 6 mm
<u>Construction</u> Treated steel Corrosion-proof treatment	<u>Operating pressure</u> 0 to 12 bar	<u>Technology</u> Push button	<u>Temperature</u> -15°C to +70°C
<u>Applications</u> Corrosive atmospheres	<u>Flow rate at 6 bar</u> 750 l/min (?P = 0,6 bar)	<u>Highlight</u> Anti-static	

Description		
Reference	Inlet BSPP female thread	Outlet 2 couplings
BRM 068103WK	G 1/2	BRM 06
BRM 068104WK	G 3/4	BRM 06

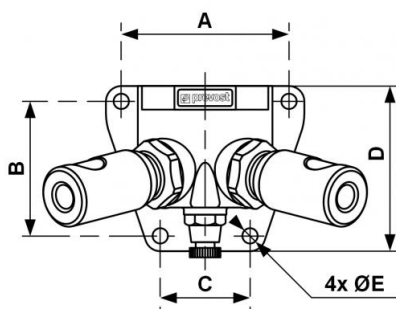

Dimensions					
Reference	A mm	B mm	C mm	D mm	E mm
BRM 068103WK	71	57	38	70	6.5
BRM 068104WK	71	57	38	70	6.5