

Female thread single wall bracket - 1 coupler and drain - Truflate Profile - ID passage 6 mm



Inlet BSPP female thread

G 1/2

Inlet NPT female thread

-

Outlet 1 coupling

USI 06

Technology

"One push" safety system (avoids hose whip)

Operating pressure

2 to 12 bar

Flow rate at 6 bar

833 l/min (?P = 0,6 bar)

ID Passage

6 mm

Temperature

-15°C to +70°C

Construction


Composite body

Highlight

Anti-static Non scratch

Description

Reference	Inlet BSPP female thread	Inlet NPT female thread	Outlet 1 coupling
USI 061103WK	G 1/2	-	USI 06
USI 061203WK	-	1/2" FNPT	USI 06

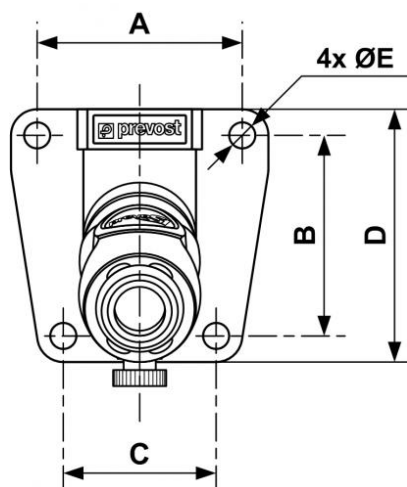

Dimensions					
Reference	A mm	B mm	C mm	D mm	E mm
USI 061103WK	51	50	38	63	63
USI 061203WK	51	50	38	63	6.5