


Female thread double port wall bracket - 2 couplers and drain - Truflate Profile - ID passage 8 mm



<u>Inlet BSPP female thread</u> G 1/2	<u>Inlet NPT female thread</u> -	<u>Outlet 2 couplings</u> USI 08	<u>Technology</u> "One push" safety system (avoids hose whip)
<u>Operating pressure</u> 2 to 12 bar	<u>Flow rate at 6 bar</u> 2028 l/min (?P = 0,6 bar)	<u>ID Passage</u> 8 mm	<u>Temperature</u> -15°C to +70°C
<u>Construction</u> Composite body	<u>Highlight</u> Anti-static Non scratch		

Description			
Reference	Inlet BSPP female thread	Inlet NPT female thread	Outlet 2 couplings
USI 088103WK	G 1/2	-	USI 08
USI 088104WK	G 3/4	-	USI 08
USI 088203WK	-	1/2" FNPT	USI 08
USI 088204WK	-	3/4" FNPT	USI 08

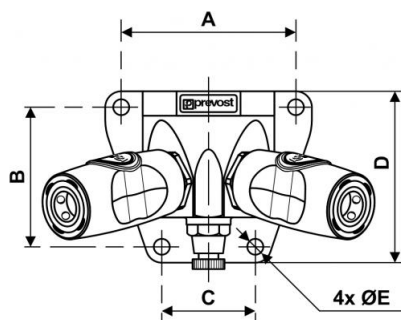

Dimensions					
Reference	A mm	B mm	C mm	D mm	E mm
USI 088103WK	71	57	38	70	6.5
USI 088104WK	71	57	38	70	6.5
USI 088203WK	71	57	38	70	6.5
USI 088204WK	71	57	38	70	6.5