

prevoS1 blow gun with composite nozzle



Blowing force (at 6 bar (g))

286

Dynamic pressure (at 10 mm at 6 bar (bar))

2.5

Air consumption (at 6 bar (Nm³/h))

14

Sound level (at 6 bar (dBA))

85

Max operating pressure

12 bar

Temperature

-15°C to +70°C

Construction

Polyamide composite body

Highlight


Compact

Connection

Built-in adaptor

Description

Reference	Blowing force (at 6 bar (g))	Dynamic pressure (at 10 mm at 6 bar (bar))	Air consumption (at 6 bar (Nm ³ /h))	Sound level (at 6 bar (dBA))
EBG 07PRE	286	2.5	14	85

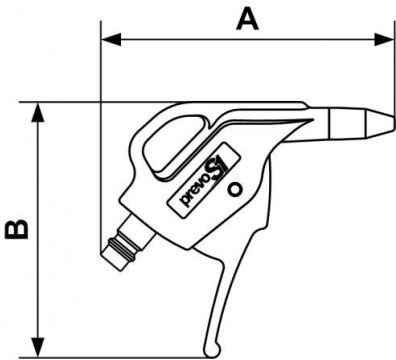

Dimensions		
Reference	A mm	B mm
EBG 07PRE	111	97