

## Parallel male thread coupler



### NPT male thread

3/4 NPT

### Operating pressure

2 to 12 bar

### Temperature

-15°C to +70°C

### Profile

Truflate

### Flow rate at 6 bar

2987 l/min (?P : 0,6 bar)

### Construction

Polyamide composite body

### Technology

"One push" safety system (avoids hose whip)


### ID Passage

11 mm

### Highlight

Anti-static Excellent efficiency Non scratch

Description		
Reference	NPT male thread	BSPP male thread
USI 111254EB	3/4 NPT	G 3/4
USI 111253EB	1/2 NPT	G 1/2
USI 111252EB	3/8 NPT	G 3/8
USI 111154EB		
USI 111153EB		
USI 111152EB		

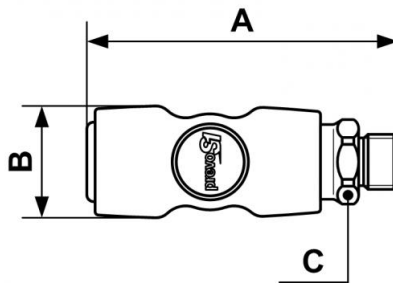

Dimensions			
Reference	A mm	B mm	C mm
USI 111254EB	118	37	30
USI 111253EB	116	37	26
USI 111252EB	112	37	26
USI 111154EB	115	37	32

Reference	A mm	B mm	C mm
<b>USI 111153EB</b>	110	37	26
<b>USI 111152EB</b>	108	37	26