

Thread swivel coupler



BSPF female thread

G 1/4

Technology

"One push" safety system (avoids hose whip)

Operating pressure

2 to 12 bar

Flow rate at 6 bar

1 820 l/min (?P : 0,6 bar)

ID Passage

7,4 mm

Temperature

-15°C to +70°C

Construction


Composite body

Highlight

Anti-static Non scratch

Description

Reference	BSPF female thread
ESI 071101SW	G 1/4
ESI 071102SW	G 3/8

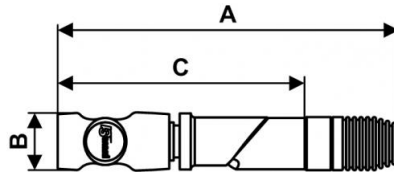

Dimensions

Reference	A mm	B mm	C mm
ESI 071101SW	176.3	32.25	128.6
ESI 071102SW	176.3	32.25	128,6