

## thread swivel coupler



### BSPF female thread

G 1/4

### Technology

"One push" safety system (avoids hose whip)

### Operating pressure

2 to 12 bar

### Flow rate at 6 bar

833 l/min (?P : 0,6 bar)

### ID Passage

6 mm

### Temperature

-15°C to +70°C

### Construction


Composite body

### Highlight

Anti-static Non scratch

## Description

Reference	BSPF female thread
ISI 061101SW	G 1/4
ISI 061102SW	G 3/8

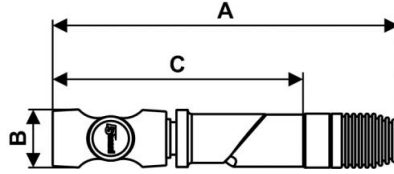

**Dimensions**

<b>Reference</b>	<b>A mm</b>	<b>B mm</b>	<b>C mm</b>
<b>ISI 061101SW</b>	172	30	125.3
<b>ISI 061102SW</b>	172	30	125.3