

Thread swivel coupler



NPT female thread

1/4" FNPT

Technology

"One push" safety system
(avoids hose whip)

Operating pressure

2 to 12 bar

Flow rate at 6 bar

833 l/min (P = 0,6 bar)

ID Passage

6 mm

Temperature

-15°C to +70°C

Construction

Composite body

Highlight

Anti-static Non scratch

Description

Reference


NPT female thread

USI 061201SW

1/4" FNPT

USI 061202SW

3/8" FNPT

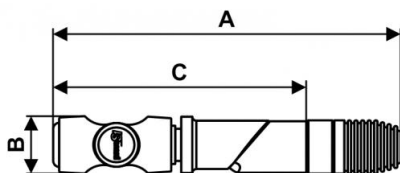

Dimensions			
Reference	A mm	B mm	C mm
USI 061201SW	71	30	20
USI 061202SW	175	30	128.3