

## Parallel male Micro straight fitting - RCD MG



### Metric male thread

M5

### For tube OD (mm)

4

### Operating pressure

0 to 10 bar

### Temperature


0°C to + 60°C

### Construction

Polymer and nickel-plated  
brass

## Description

| Reference         | Metric male thread | For tube OD (mm) |
|-------------------|--------------------|------------------|
| <b>RLD MG04M5</b> | M5                 | 4                |
| <b>RLD MG06M5</b> | M5                 | 6                |
| <b>RLD MG04M3</b> | M3                 | 4                |

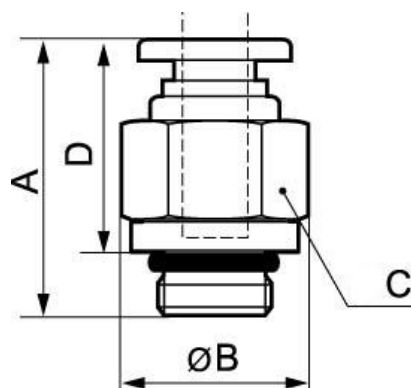

| Dimensions        |      |      |      |      |
|-------------------|------|------|------|------|
| Reference         | A mm | B mm | C mm | D mm |
| <b>RLD MG04M5</b> | 17.5 | 9.2  | 8    | 14   |
| <b>RLD MG06M5</b> | 20   | 11.5 | 10   | 16.5 |
| <b>RLD MG04M3</b> | 17   | 9.2  | 8    | 14   |