

PVR TER - PVC Female - female - female reducing tee piece



For pipe OD (mm)

20

Max operating pressure

13 bar at 23°C 7 bar at 50°C

Vacuum capability

-0.98 bar (vacuum 98%)

Temperature

-20°C to +50°C

Construction

Pipe and fittings: PVC


Meets standards

PED REACH

Description

Reference	For pipe OD (mm)
PVR TER2520	20
PVR TER3220	20
PVR TER3225	25
PVR TER4020	20
PVR TER4025	25
PVR TER5020	20

Reference	For pipe OD (mm)
PVR TER5025	25
PVR TER6320	20
PVR TER6325	25

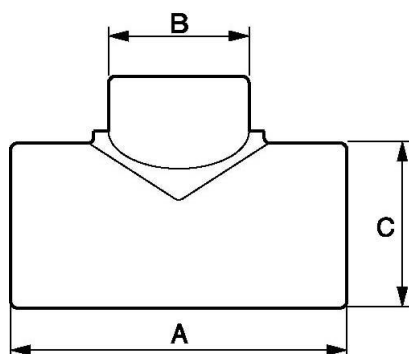

Dimensions			
Reference	A mm	B mm	C mm
PVR TER2520	66	27.5	33.5
PVR TER3220	78	27.5	42
PVR TER3225	78	33.5	42
PVR TER4020	94	27.5	51
PVR TER4025	94	33.5	51
PVR TER5020	114	27.5	61
PVR TER5025	114	33.5	61
PVR TER6320	142	27.5	75
PVR TER6325	142	33.5	75