

## 90° swivelling parallel male thread elbow - RIC MG



### BSP male thread

G 3/8

### For tube OD (mm)

8

### Operating pressure

0 to 16 bar

### Temperature


0°C to +120°C

### Construction

Stainless steel AISI 316

## Description

| Reference         | BSP male thread | For tube OD (mm) |
|-------------------|-----------------|------------------|
| <b>RIC MG0400</b> | G 1/8           | 4                |
| <b>RIC MG0600</b> | G 1/8           | 6                |
| <b>RIC MG0601</b> | G 1/4           | 6                |
| <b>RIC MG0800</b> | G 1/8           | 8                |
| <b>RIC MG0801</b> | G 1/4           | 8                |
| <b>RIC MG0802</b> | G 3/8           | 8                |

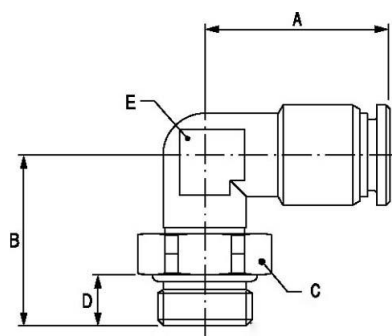

## Dimensions

| Reference         | A mm | B mm | C mm | D mm |
|-------------------|------|------|------|------|
| <b>RIC MG0400</b> | 17   | 16   | 13   | 5    |
| <b>RIC MG0600</b> | 18   | 17   | 13   | 5    |
| <b>RIC MG0601</b> | 18   | 19   | 17   | 7    |
| <b>RIC MG0800</b> | 20   | 18   | 13   | 5    |
| <b>RIC MG0801</b> | 21   | 20   | 17   | 7    |
| <b>RIC MG0802</b> | 21   | 22   | 19   | 8    |