


Split-proof twin line welding hose (20 m coil)



<u>ID/OD (mm)</u> 6 x 12	<u>Bend radius (mm)</u> 55	<u>Coil (m)</u> 20	<u>Fluid</u> Oxygen and Acetylen
<u>Temperature</u> -30°C to +80°C	<u>Construction</u> Rubber	<u>Applications</u> Welding, cutting	

Description				
Reference	ID/OD (mm)	Bend radius (mm)	Coil (m)	Fluid
TUB OA6	6 x 12	55	20	Oxygen and Acetylen
TUB OA10	10 x 17	75	20	Oxygen and Acetylen

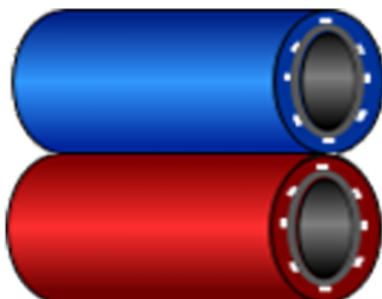