


## DLOI series - 304 Stainless steel with thermoplastic hose - Food grade



<b>ID/OD (mm)</b> 16 x 24	<b>Length (m)</b> 25	<b>Coupler</b> ELS 09	<b>Swivel inlet BSPP male thread</b> G 1/2
<b>Weight (kg)</b> 44	<b>Technology</b> Pipe locked with ratchet stop	<b>Max operating pressure</b> 10 bar	<b>Temperature</b> -15°C to +60°C
<b>Construction</b> AISI 304 stainless steel case	<b>Connection</b> 1 m of inlet supply hose	<b>Equipped with</b> Fixed bracket	

Description					
Reference	ID/OD (mm)	Length (m)	Coupler	Swivel inlet BSPP male thread	Weight (kg)
<b>DLOI 1625LS</b>	16 x 24	25	ELS 09	G 1/2	44

Reference	ID/OD (mm)	Length (m)	Coupler	Swivel inlet BSPF male thread	Weight (kg)
<b>DLOI 1920LS</b>	19 x 28	20	ELS 09	G 1	42

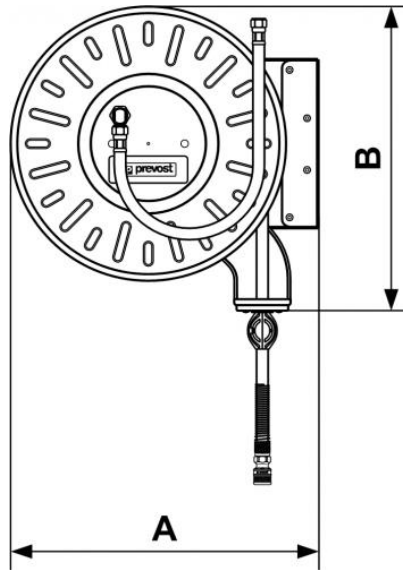

### Dimensions

Reference	A mm	B mm
<b>DLOI 1625LS</b>	624	610
<b>DLOI 1920LS</b>	624	610