

Straight hydraulic stud fittings - High Pressure - HGB



BSPT male thread

R 1/8

BSPP male thread

G 1/8

Max operating

pressure

440

Temperature

-40°C to +100°C


Construction

Steel

Description

Reference	BSPT male thread	BSPP male thread	Max operating pressure
HGB 1818	R 1/8	G 1/8	440
HGB 1814	R 1/8	G 1/4	440
HGB 1418	R 1/4	G 1/8	420
HGB 1414	R 1/4	G 1/4	420
HGB 1438	R 1/4	G 3/8	350

Reference	BSPT male thread	BSPP male thread	Max operating pressure
HGB 3814	R 3/8	G 1/4	310
HGB 3838	R 3/8	G 3/8	310
HGB 3812	R 3/8	G 1/2	310
HGB 1238	R 1/2	G 3/8	290
HGB 1212	R 1/2	G 1/2	290
HGB 1234	R 1/2	G 3/4	250
HGB 3434	R 3/4	G 3/4	250
HGB 3401	R 3/4	G 1	200
HGB 0101	R 1	G 1	200

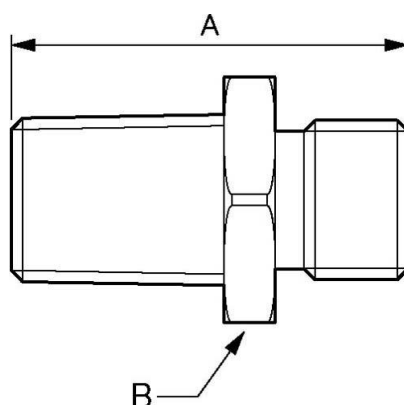

Dimensions		
Reference	A mm	B mm
HGB 1818	26	13
HGB 1814	28	14
HGB 1418	32	14
HGB 1414	32	14
HGB 1438	34	17
HGB 3814	32	17
HGB 3838	34	17
HGB 3812	38	22
HGB 1238	41	22
HGB 1212	43	22
HGB 1234	46	27
HGB 3434	46	27
HGB 3401	49	36
HGB 0101	53	36