

Straight hydraulic stud fittings - High Pressure - HNJ



NPT male thread

1/8

Thread (JIC 37°)

7/16

Max operating pressure (bar)

440

Temperature

-40°C to +100°C


Construction

Steel

Description

Reference	NPT male thread	Thread (JIC 37°)	Max operating pressure (bar)
HNJ 250716	1/8	7/16	440
HNJ 25012	1/8	1/2	440
HNJ 251716	1/4	7/16	420
HNJ 25112	1/4	1/2	420
HNJ 251916	1/4	9/16	350

Reference	NPT male thread	Thread (JIC 37°)	Max operating pressure (bar)
HNJ 25134	1/4	3/4	350
HNJ 252716	3/8	7/16	310
HNJ 25212	3/8	1/2	310
HNJ 252916	3/8	9/16	310
HNJ 25234	3/8	3/4	310
HNJ 25278	3/8	7/8	310
HNJ 253916	1/2	9/16	290
HNJ 25334	1/2	3/4	290
HNJ 25378	1/2	7/8	290
HNJ 25434	1/2	3/4	250

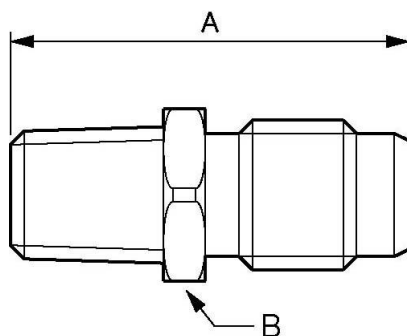

Dimensions		
Reference	A mm	B mm
HNJ 250716	30	13
HNJ 25012	30	14
HNJ 251716	34	14
HNJ 25112	34	14
HNJ 251916	34	17
HNJ 25134	38	19
HNJ 252716	35	19
HNJ 25212	35	19
HNJ 252916	35	19
HNJ 25234	38	19
HNJ 25278	41	24
HNJ 253916	41	22
HNJ 25334	44	22
HNJ 25378	46	24
HNJ 25434	45	27