

Straight hydraulic stud fittings - High Pressure - HGD



BSPT male thread

R 1/4

Male thread (DIN

3852-1)

M14 x 1.5

Max operating

pressure (bar)

330

Temperature

-40°C to +100°C


Construction

Steel

Description

Reference	BSPT male thread	Male thread (DIN 3852-1)	Max operating pressure (bar)
HGD 14141	R 1/4	M14 x 1.5	330
HGD 14161	R 1/4	M16 x 1.5	310
HGD 38161	R 3/8	M16 x 1.5	310
HGD 38181	R 3/8	M18 x 1.5	250
HGD 12181	R 1/2	M18 x 1.5	250

Reference	BSPT male thread	Male thread (DIN 3852-1)	Max operating pressure (bar)
HGD 12221	R 1/2	M22 x 1.5	250
HGD 12261	R 1/2	M26 x 1.5	200
HGD 34261	R 3/4	M26 x 1.5	200
HGD 34301	R 3/4	M30 x 1.5	200
HGD 01301	R 1	M30 x 1.5	200

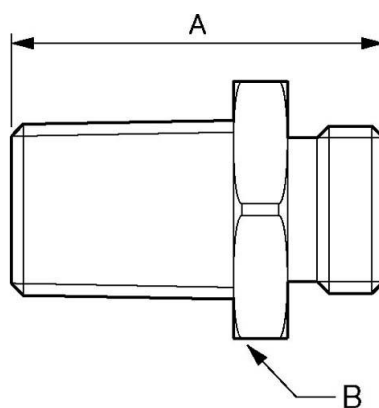

Dimensions		
Reference	A mm	B mm
HGD 14141	30	14
HGD 14161	30	17
HGD 38161	30	17
HGD 38181	31	19
HGD 12181	37	22
HGD 12221	39	22
HGD 12261	40	27
HGD 34261	40	27
HGD 34301	41	27
HGD 01301	45	36