


Polyurethane recoils with rigid and swiveling male fittings

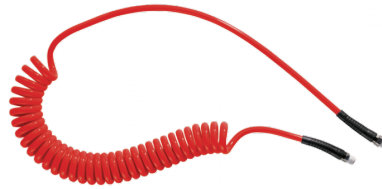

Red.
Teflon-coated coupler.

| | | |
|---|--|---|
| <u>BSPT male thread</u> R 1/4 | <u>ID/OD (mm)</u> 6.5 x 10 | <u>Coil Ø (mm)</u> 42 |
| <u>Max length (m)</u> 4 | <u>Min. length (m)</u> 0.4 | <u>Max operating pressure</u> 8 bar |
| <u>Temperature</u> -15°C to +70°C | <u>Construction</u> Polyurethane | <u>Highlight</u> Non scratch |

| Description | | | | | |
|----------------|------------------|------------|-------------|----------------|-----------------|
| Reference | BSPT male thread | ID/OD (mm) | Coil Ø (mm) | Max length (m) | Min. length (m) |
| PUS 64R | R 1/4 | 6.5 x 10 | 42 | 4 | 0.4 |
| PUS 66R | R 1/4 | 6.5 x 10 | 52 | 6 | 0.63 |