

ALTO 2 - Lubricator



BSPP female thread

G 3/8

Flow rate (l/min at 6 bar ΔP : 0.5bar)

3000

Max operating pressure (bar)

12

Temperature

+5°C to +50 °C

Construction

Body : Aluminium


Polycarbonate bowl with
metallic protection

Equipped with

Manual drain

Description

Reference	BSPP female thread	Flow rate (l/min at 6 bar ΔP : 0.5bar)	Max operating pressure (bar)
TL 2	G 3/8	3000	12

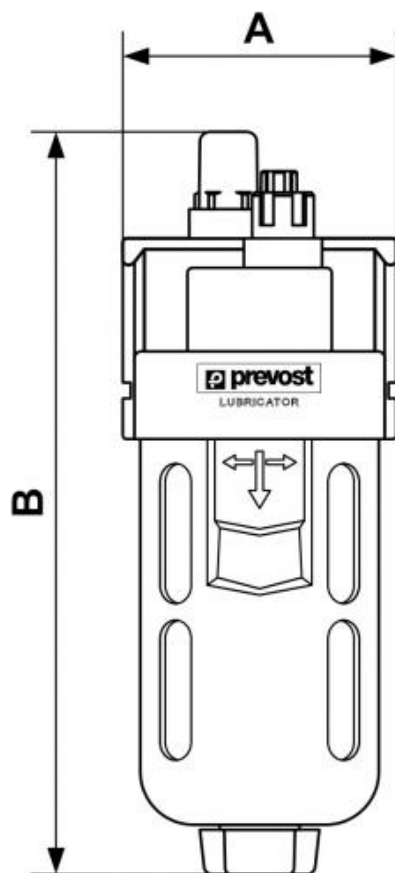

Dimensions

Reference	A mm	B mm
TL 2	55	157