

ALTO 3 - Regulator



BSPP female thread

G 1/2

Flow rate (l/min at 7 bar ΔP : 1bar)

4000

Operating pressure (bar)

Inlet: 15 Outlet: 0.5-10

Temperature

+5°C to +50 °C

Construction

Body : Aluminium

Polycarbonate bowl with
metallic protection


Equipped with

Manual drain

Description

Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP : 1bar)	Operating pressure (bar)
TR 3	G 1/2	4000	Inlet: 15 Outlet: 0.5-10
TR B23	G 1/2	4000	Inlet: 15 Outlet: 0.2-2

Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP : 1bar)	Operating pressure(bar)
TR B43	G 1/2	4000	Inlet: 15 Outlet: 0.2-4

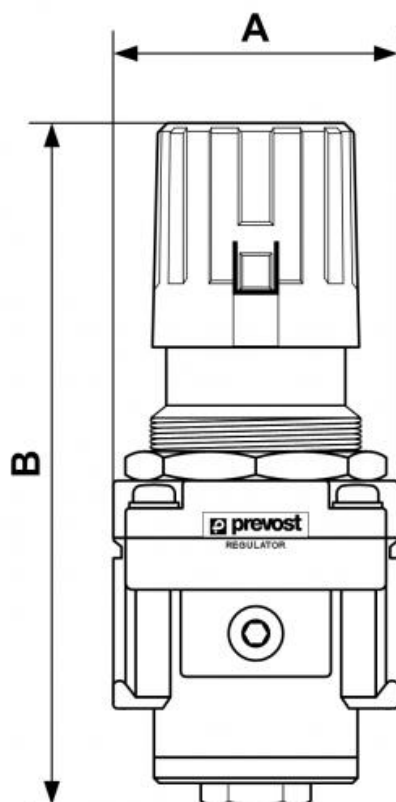

Dimensions		
Reference	A mm	B mm
TR 3	70	165
TR B23	70	165
TR B43	70	165