

## Altitude refrigeration dryers



**Consumption (kW)**

0.24

**Dryer for compressor of (CV)**

4

**Operating pressure**

3 to 16 bar

**BSPB male thread**

G 3/8

**Sound level (dB(A))**

45

**Temperature**

+4,4°C to +43°C

**Dewpoint**

+ 3°C

**Flow rate (m3/h)**

30

**Weight (kg)**


19

**Supply voltage**

230 V - 50 HZ

### Description

Reference	Consumption (kW)	BSPP male thread	Flow rate (m3/h)	Dryer for compressor of (CV)	Sound level (dB(A))	Weight (kg)
<b>ALF 30</b>	0.24	G 3/8	30	4	45	19
<b>ALF 60</b>	0.41	G 3/4	60	7.5	51	29
<b>ALF 80</b>	0.46	G 3/4	80	10	53	29
<b>ALF 100</b>	0.57	G 3/4	100	15	53	41
<b>ALF 140</b>	0.58	G 1	140	20	60	50
<b>ALF 161</b>	0.6	G 1	160	25	60	53
<b>ALF 240</b>	0.87	G 1	240	35	64	58
<b>ALF 315</b>	1.1	G 2	315	40	69	72
<b>ALF 360</b>	1.3	G 2	360	50	69	78
<b>ALF 470</b>	1.48	G 2	470	60	69	85
<b>ALF 580</b>	1.9	G 2	580	80	71	100
<b>ALF 680</b>	2.45	G 2	680	90	72	112
<b>ALF 820</b>	2.55	G 2	820	110	72	134
<b>ALF 1000</b>	2.70	G 2	1000	125	73	155

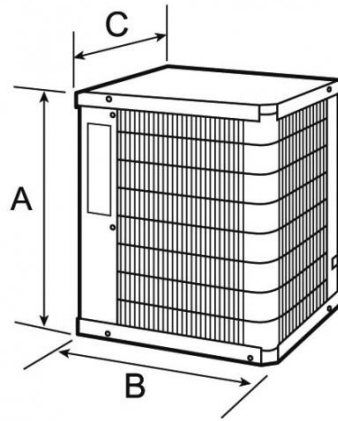

### Dimensions

Reference	A mm	B mm	C mm
<b>ALF 30</b>	390	344	320
<b>ALF 60</b>	575	368	419
<b>ALF 80</b>	575	368	419
<b>ALF 100</b>	575	500	523
<b>ALF 140</b>	601	363	891
<b>ALF 161</b>	601	363	891
<b>ALF 240</b>	601	363	951
<b>ALF 315</b>	761	483	1011
<b>ALF 360</b>	761	483	1011
<b>ALF 470</b>	761	483	1011

Reference	A mm	B mm	C mm
<b>ALF 580</b>	811	533	1191
<b>ALF 680</b>	811	533	1191
<b>ALF 820</b>	811	533	1291
<b>ALF 1000</b>	811	583	1361