

ALTO 1 - 2-piece-set - Filter-Regulator-Lubricator (gauge included) with wall bracket and diverter block



BSPP female thread

G 1/4

Flow rate (l/min at 7 bar

?P : 1bar)

500

Max operating pressure

(bar)

10

Filtration (µm)

25

Temperature

+5°C to +50 °C

Construction


Body : Aluminium Polycarbonate bowl with metallic protection

Equipped with

Manual drain

Description

Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP : 1bar)	Max operating pressure (bar)	Filtration (µm)
TB SME1	G 1/4	500	10	25

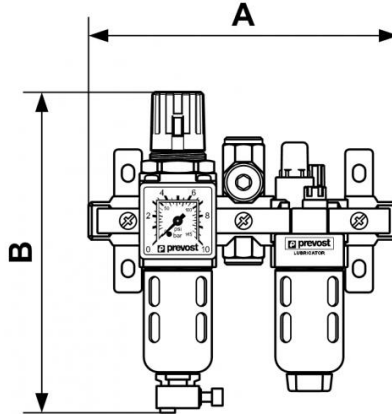

Dimensions

Reference	A mm	B mm
TB SME1	164	169