

ALTO 2 - 2-piece-set - Filter-Regulator-Lubricator (gauge included) with wall bracket and diverter block



BSPP female thread

G 3/8

Flow rate (l/min at 7 bar ΔP)

1bar) = 1250

Max operating pressure (bar)

12

Filtration (μm)

25

Temperature

+5°C to +50 °C

Construction

Body : Aluminium


Polycarbonate bowl with
metallic protection

Equipped with

Manual drain

Description

Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP)	Max operating pressure (bar)	Filtration (μm)
TB SME2	G 3/8	1bar) = 1250	12	25

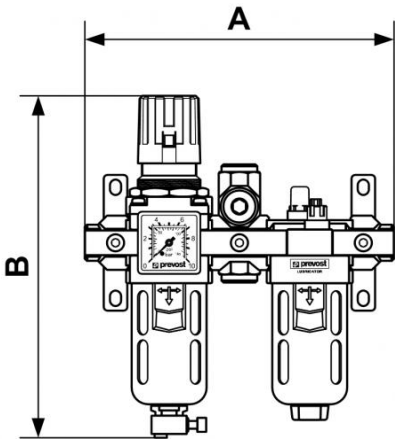

Dimensions		
Reference	A mm	B mm
TB SME2	204	220