


Hose tail coupler



<u>For hose ID (mm)</u> 6	<u>Technology</u> "One push" safety system (avoids hose whip)	<u>Operating pressure</u> 2 to 12 bar	<u>Flow rate at 6 bar</u> 1 820 l/min (?P = 0,6 bar)
<u>ID Passage</u> 7,4 mm	<u>Temperature</u> -15°C to +70°C	<u>Construction</u> Composite body	<u>Highlight</u> Anti-static Non scratch

Description	
Reference	For hose ID (mm)
ESI 071806	6
ESI 071808	8
ESI 071809	9
ESI 071810	10
ESI 071813	13

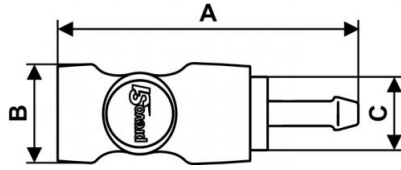

Dimensions

Reference	A mm	B mm	C mm
ESI 071806	87.3	32.25	22.6
ESI 071808	87.3	32.25	22.6
ESI 071809	87.3	32.25	22.6
ESI 071810	87.3	32.25	22.6
ESI 071813	92.3	32.25	22.6