

Parallel male Micro straight fitting - RLD MG



BSPP male thread

G 1/8

For tube OD (mm)

4

Operating pressure

0 to 10 bar

Temperature


0°C to + 60°C

Construction

Polymer and nickel-plated
brass

Description

Reference	BSPP male thread	For tube OD (mm)
RLD MG0600	G 1/8	6
RLD MG0400	G 1/8	4

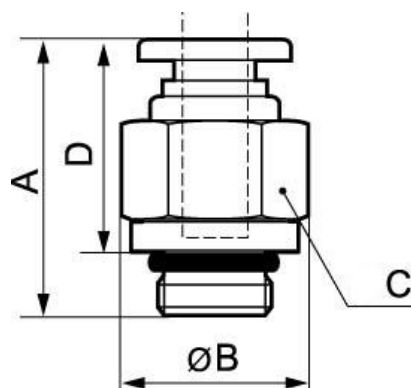

Dimensions				
Reference	A mm	B mm	C mm	D mm
RLD MG0600	17.5	11.5	10	12.5
RLD MG0400	15	11.5	10	10