


DMO - DGO series - Steel with thermoplastic hose - Food grade



<u>ID/OD (mm)</u> 16 x 24	<u>Length (m)</u> 10	<u>Coupler</u> ELS 09	<u>Swivel inlet BSPP male thread</u> G 1/2
<u>Weight (kg)</u> 20	<u>Technology</u> Pipe locked with ratchet stop	<u>Max operating pressure</u> 10 bar	<u>Temperature</u> -15°C to +60°C
<u>Construction</u> Epoxy-coated steel case	<u>Connection</u> 1 m of inlet supply hose	<u>Equipped with</u> Fixed bracket	

Description					
Reference	ID/OD (mm)	Length (m)	Coupler	Swivel inlet BSPP male thread	Weight (kg)

DMO 1610LS	16 x 24	10	ELS 09	G 1/2	20
DGO 1615LS	16 x 24	15	ELS 09	G 1/2	25

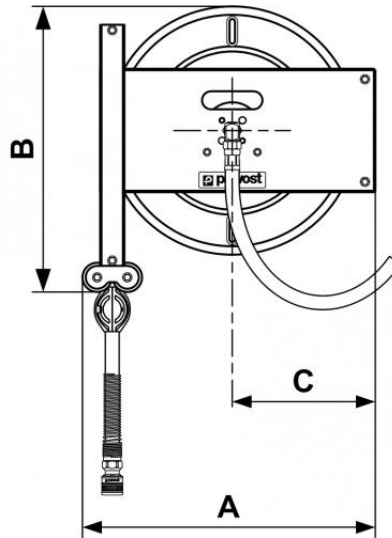

Dimensions

Reference	A mm	B mm	C mm
DMO 1610LS	485	475	237
DGO 1615LS	485	475	237