

Parallel male banjo fitting - RPB MG



BSPB male thread

G 1/8

For tube OD (mm)

4

Operating pressure

0 to 10 bar

Temperature

0°C to + 60°C

Construction


Polymer and nickel-plated brass

Description

Reference	BSPB male thread	For tube OD (mm)
RPB MG0400	G 1/8	4
RPB MG0401	G 1/4	4
RPB MG0500	G 1/8	5
RPB MG0501	G 1/4	5
RPB MG0502	G 3/8	5

Reference	BSPB male thread	For tube OD (mm)
RPB MG0503	G 1/2	5
RPB MG0600	G 1/8	6
RPB MG0601	G 1/4	6
RPB MG0602	G 3/8	6
RPB MG0603	G 1/2	6
RPB MG0800	G 1/8	8
RPB MG0801	G 1/4	8
RPB MG0802	G 3/8	8
RPB MG0803	G 1/2	8
RPB MG1000	G 1/8	10
RPB MG1001	G 1/4	10
RPB MG1002	G 3/8	10
RPB MG1003	G 1/2	10
RPB MG1201	G 1/4	12
RPB MG1202	G 3/8	12

Reference	BSPB male thread	For tube OD (mm)
RPB MG1203	G 1/2	12
RPB MG1602	G 3/8	16
RPB MG1603	G 1/2	16

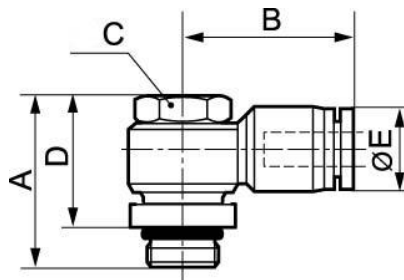

Dimensions					
Reference	A mm	B mm	C mm	D mm	E mm
RPB MG0400	23.5	23.5	10	18	10
RPB MG0401	28	28	14	22	10
RPB MG0500	23.5	23.5	10	18	12.8
RPB MG0501	28	28	14	22	12.8
RPB MG0502	34	34	19	27.5	12.8
RPB MG0503	38	38	24	30	12.8
RPB MG0600	23.5	23.5	10	18	12.8

Reference	A mm	B mm	C mm	D mm	E mm
RPB MG0601	28	28	14	22	12.8
RPB MG0602	34	34	19	27.5	12.8
RPB MG0603	38	38	24	30	12.8
RPB MG0800	23.5	24.6	10	18	13.8
RPB MG0801	28	26.8	14	22	13.8
RPB MG0802	34	28.8	19	27.5	13.8
RPB MG0803	38	30.5	24	30	13.8
RPB MG1000	23.5	28.5	10	18	16.8
RPB MG1001	28	31	14	22	16.8
RPB MG1002	34	31	19	27.5	16.8
RPB MG1003	38	34	24	30	16.8
RPB MG1201	28	32	14	22	19.8
RPB MG1202	34	34	19	27.5	19.8
RPB MG1203	38	36	24	30	19.8
RPB MG1602	34	34.8	19	27.5	23.8
RPB MG1603	38	36.6	24	30	23.8